
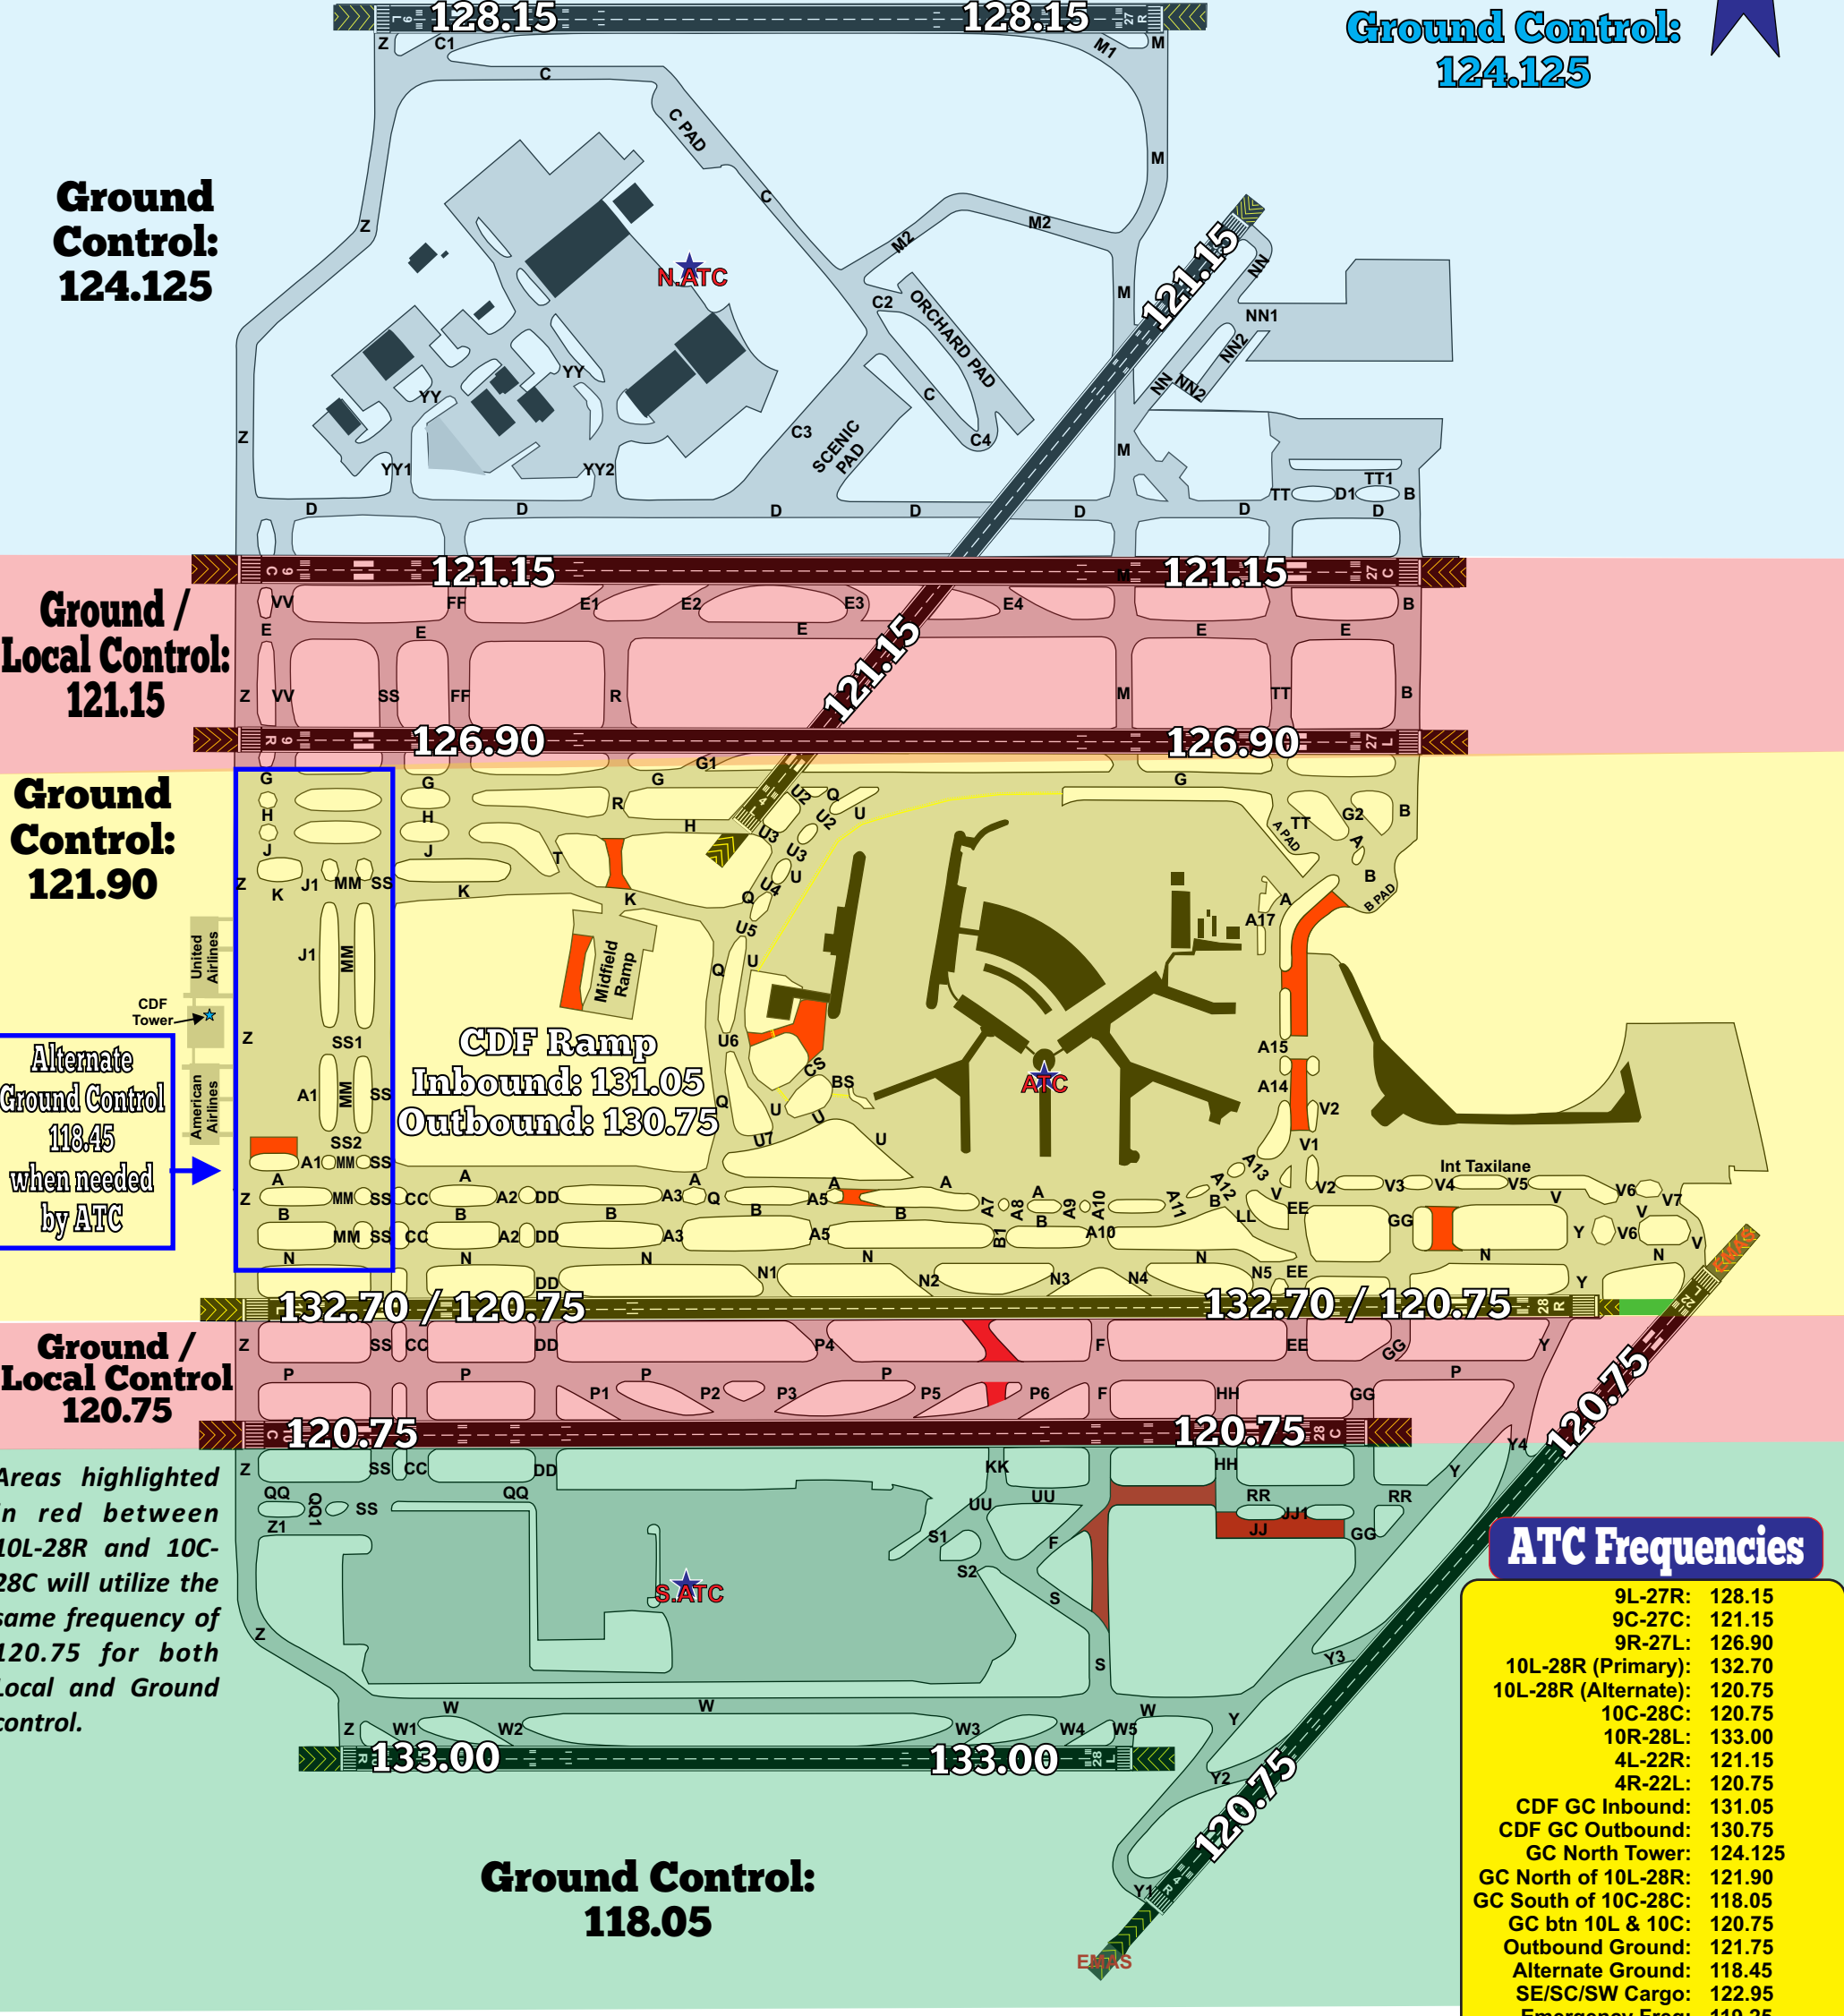


O'Hare International Airport

Frequency Allocation Map

Effective: April 3, 2025 to May 8, 2025

 Closed Airfield Pavements



Ground Control:
124.125

Ground
Control:
124.125

Ground /
Local Control:
121.15

Ground
Control:
121.90

Alternate
Ground Control
118.45
when needed
by ATC

CDF Ramp
Inbound: 131.05
Outbound: 130.75

Ground /
Local Control
120.75

Areas highlighted
in red between
10L-28R and 10C-
28C will utilize the
same frequency of
120.75 for both
Local and Ground
control.

Ground Control:
118.05

ATC Frequencies

9L-27R:	128.15
9C-27C:	121.15
9R-27L:	126.90
10L-28R (Primary):	132.70
10L-28R (Alternate):	120.75
10C-28C:	120.75
10R-28L:	133.00
4L-22R:	121.15
4R-22L:	120.75
CDF GC Inbound:	131.05
CDF GC Outbound:	130.75
GC North Tower:	124.125
GC North of 10L-28R:	121.90
GC South of 10C-28C:	118.05
GC btn 10L & 10C:	120.75
Outbound Ground:	121.75
Alternate Ground:	118.45
SE/SC/SW Cargo:	122.95
Emergency Freq:	119.25
ATIS:	135.40
"YY" Roller Gates:	122.90



Map to be used for
reference ONLY
Not to be used for
aircraft or taxi navigation
*It is the responsibility of the
user to ensure they have the
most accurate airport reference map
prior to driving or taxiing on the airfield*

