

O'Hare International Airport

Aircraft Re-Positioning Airfield Drivers Map

WESTERN GLOBAL

Effective: October 31, 2024 to Mid-December 2024



ATC Frequencies

9L-27R:	128.15
9C-27C:	121.15
9R-27L:	126.90
10L-28R (Primary):	132.70
10L-28R (Alternate):	120.75
10C-28C:	120.75
10R-28L:	133.00
4L-22R:	121.15
4R-22L:	120.75
CDF GC Inbound:	131.05
CDF GC Outbound:	130.75
GC North Tower:	124.125
GC North of 10L-28R:	121.90
GC South of 10C-28C:	118.05
GC btn 10L & 10C:	120.75
Outbound Ground:	121.75
Alternate Ground:	118.45
SE/SC/SW Cargo:	122.95
Emergency Freq:	119.25
ATIS:	135.40
"YY" Roller Gates:	122.90

LEGEND

- Service Road
- Restricted CDA Access Roads
- Restricted Fire Access Roads
- Aircraft Design Group VI Restricted Areas
- Crash Fire Rescue Stations
- Fire Burn Pit Training Facility
- Airfield Security Post Locations
- Areas Under Construction
- Closed AOA Pavement



Map to be used for reference ONLY
Not to be used for aircraft or taxi navigation
It is the responsibility of the user to ensure they have the most accurate airport reference map prior to driving or taxiing on the airfield

ASSET 2009-2024
15 Years of Aviation Safety
www.oharetraining.com www.ordsafe.com



O'Hare International Airport Frequency Allocation Airfield Map

Effective: October 31, 2024 to Mid-December 2024

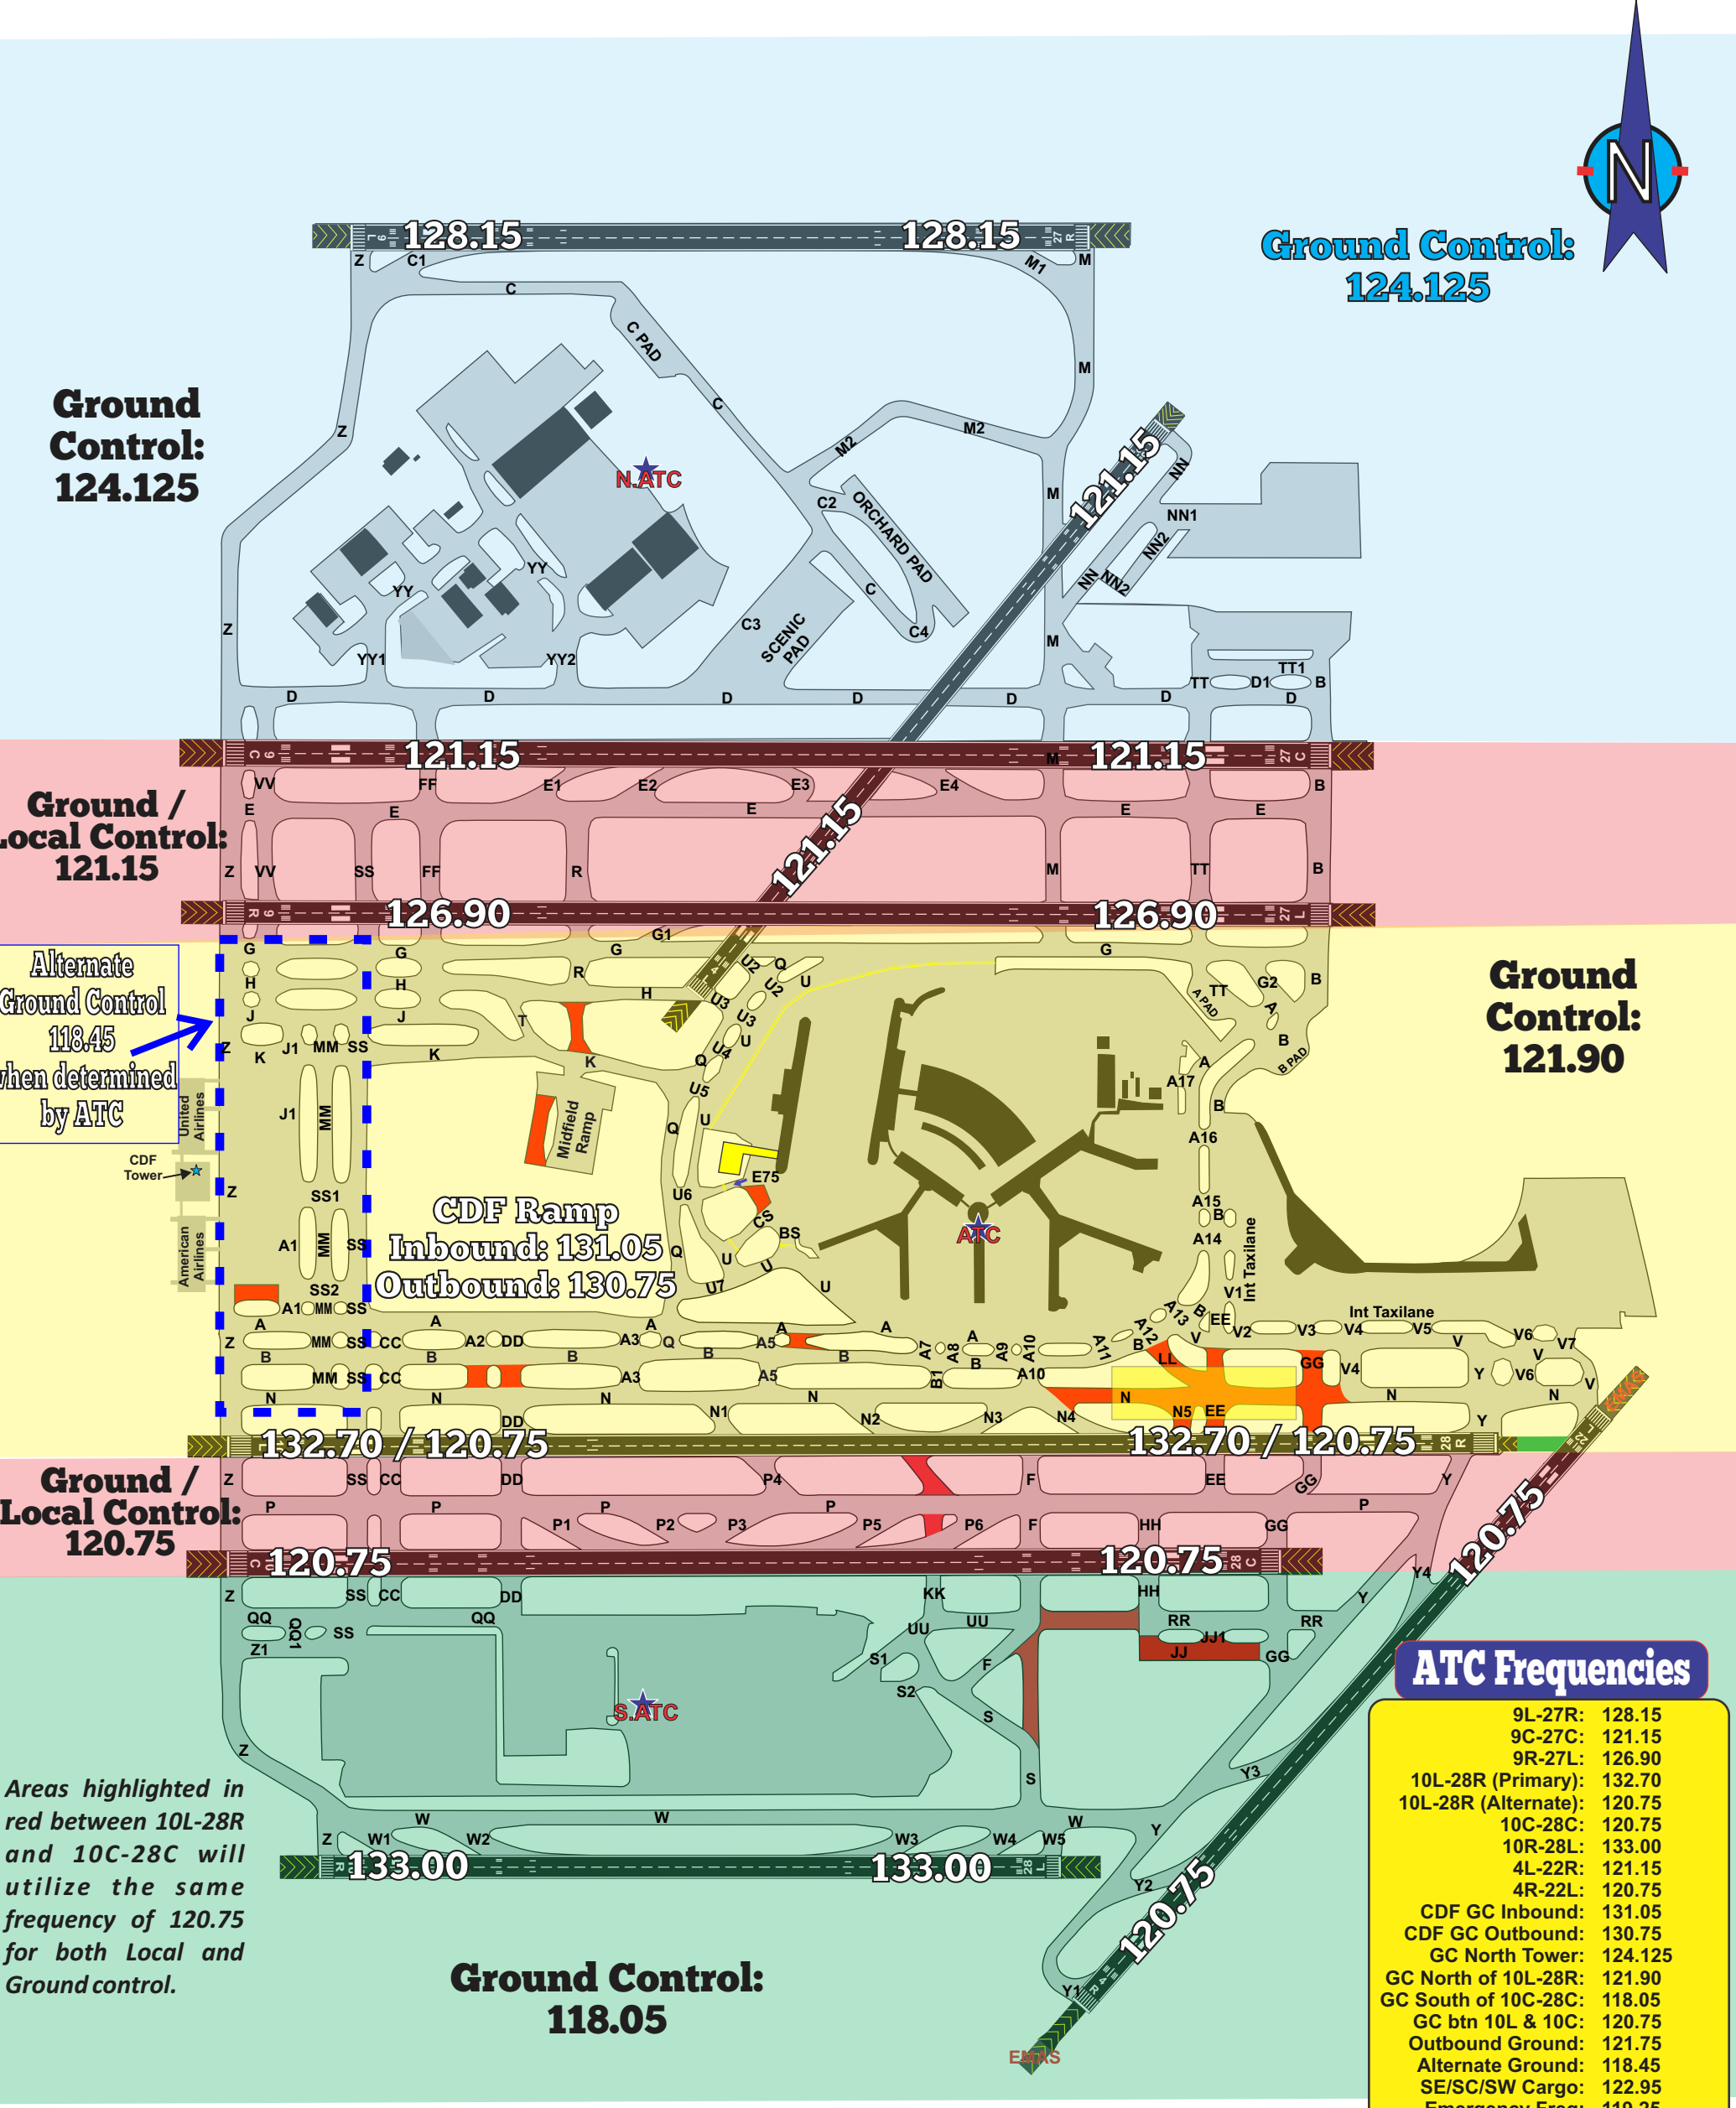

Ground Control:
124.125

Ground Control:
124.125

Ground / Local Control:
121.15

Alternate Ground Control
118.45
when determined by ATC

Ground Control:
121.90

CDF Ramp
Inbound: 131.05
Outbound: 130.75

Ground / Local Control:
120.75

Areas highlighted in red between 10L-28R and 10C-28C will utilize the same frequency of 120.75 for both Local and Ground control.

Ground Control:
118.05

ATC Frequencies

9L-27R:	128.15
9C-27C:	121.15
9R-27L:	126.90
10L-28R (Primary):	132.70
10L-28R (Alternate):	120.75
10C-28C:	120.75
10R-28L:	133.00
4L-22R:	121.15
4R-22L:	120.75
CDF GC Inbound:	131.05
CDF GC Outbound:	130.75
GC North Tower:	124.125
GC North of 10L-28R:	121.90
GC South of 10C-28C:	118.05
GC btn 10L & 10C:	120.75
Outbound Ground:	121.75
Alternate Ground:	118.45
SE/SC/SW Cargo:	122.95
Emergency Freq:	119.25
ATIS:	135.40
"YY" Roller Gates:	122.90

Map to be used for reference ONLY
Not to be used for aircraft or taxi navigation
It is the responsibility of the user to ensure they have the most accurate airport reference map prior to driving or taxiing on the airfield



www.oharetraining.com

www.ordsafe.com