


O'Hare International Airport

Frequency Allocation Map


Effective: November 22, 2025 to December 12, 2025

 Closed Airfield Pavements



Ground Control:
124.125


Ground
Control:
124.125

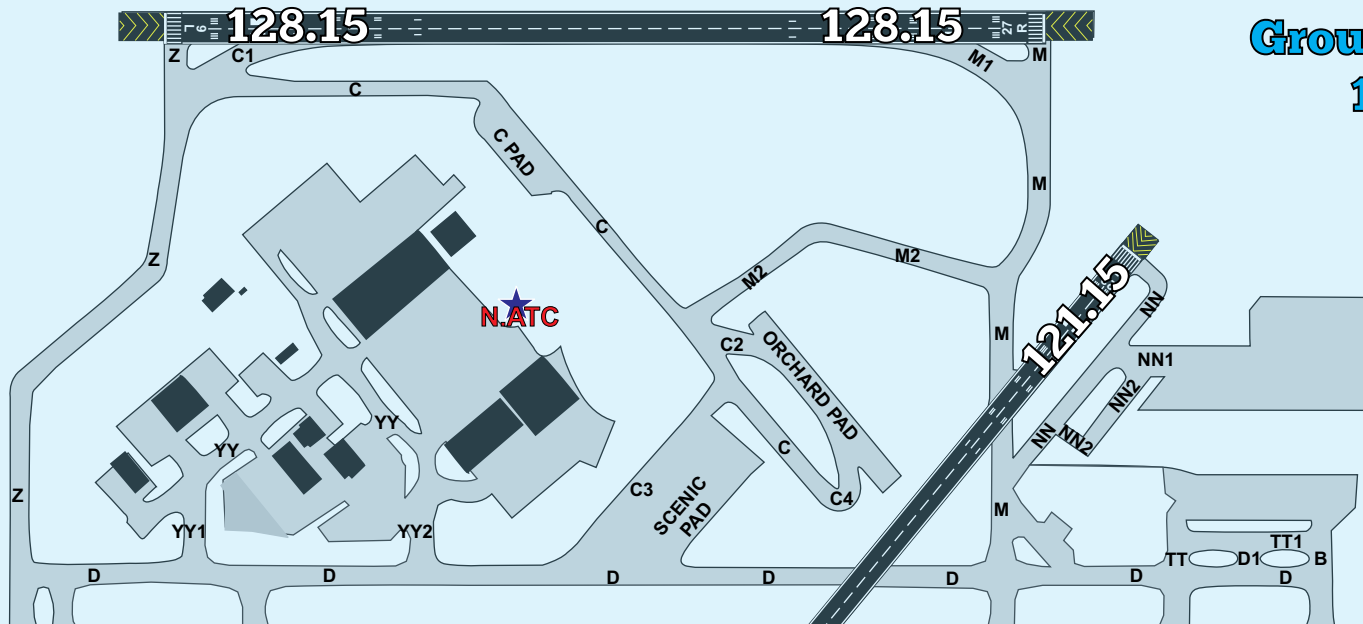

Ground /
Local Control:
121.15


Ground
Control:
121.90

Alternate
Ground Control
118.45
when needed
by ATC

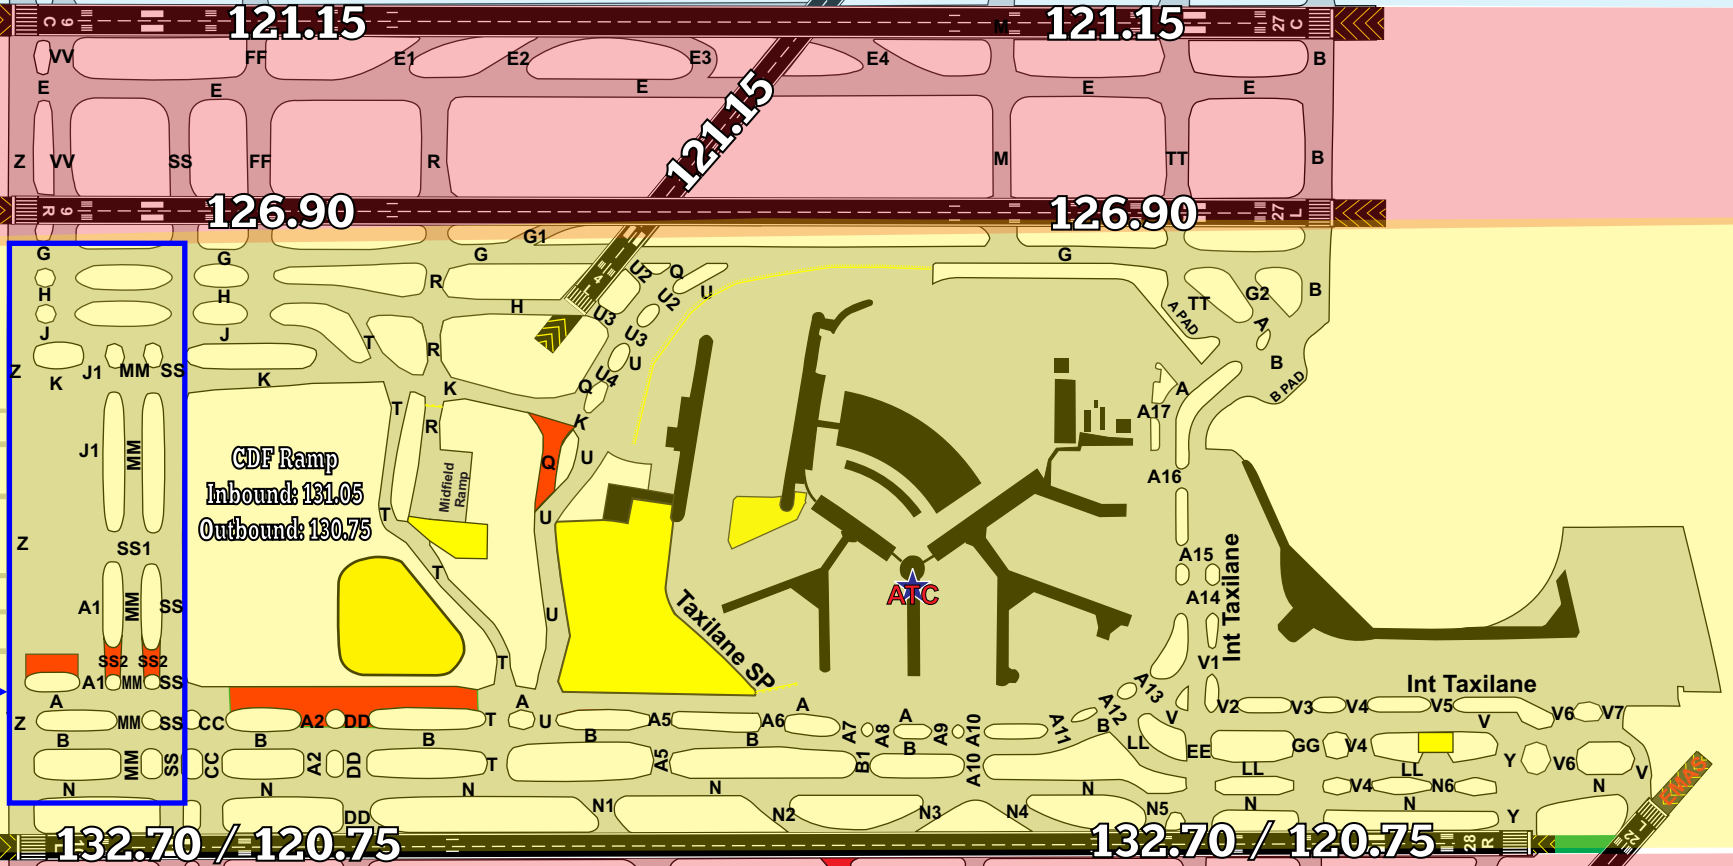

Ground /
Local Control
120.75

Areas highlighted
in red between
10L-28R and 10C-
28C will utilize the
same frequency of
120.75 for both
Local and Ground
control.

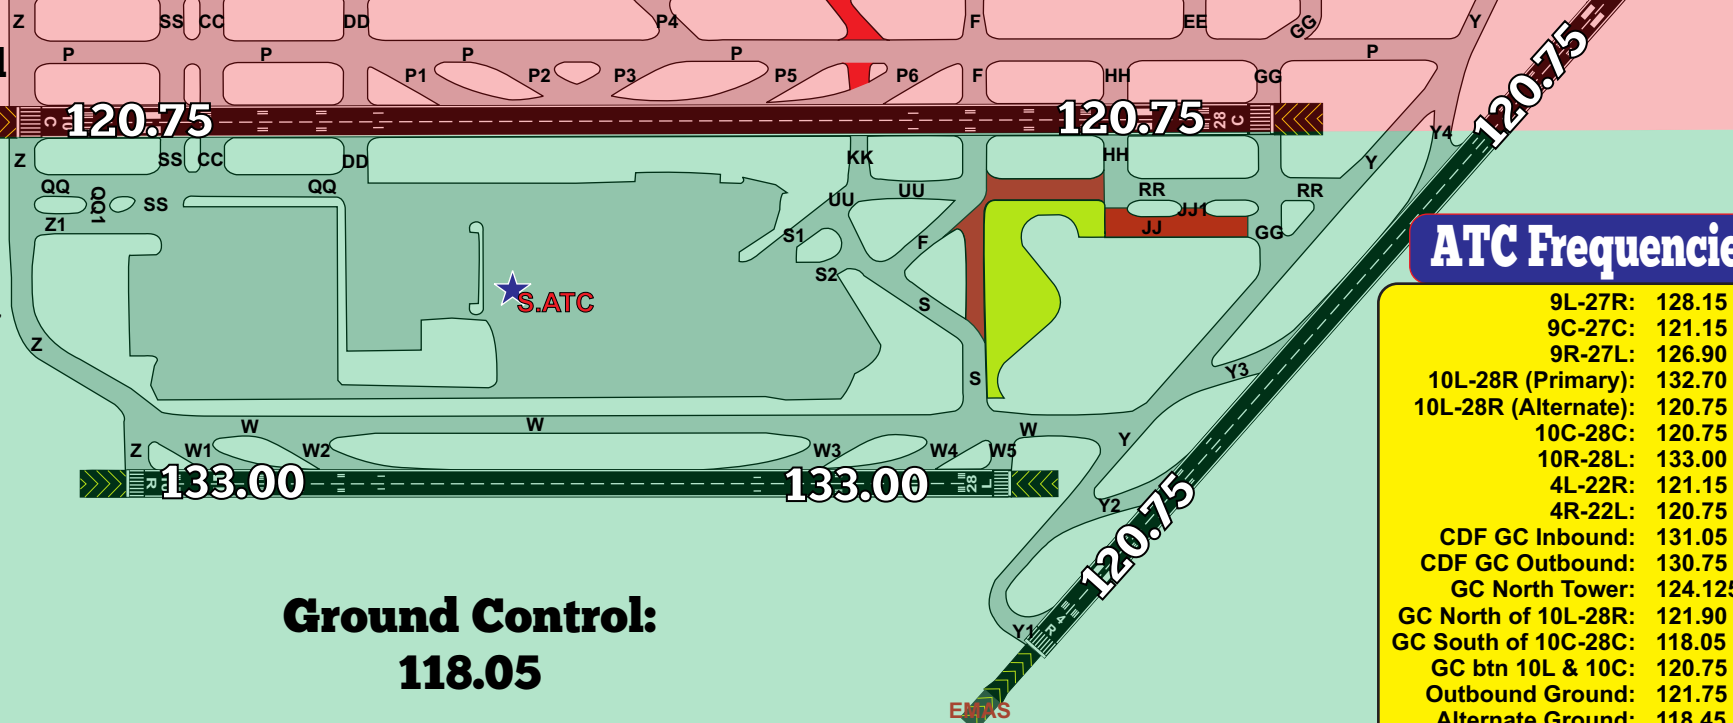

Ground Control:
118.05

ATC Frequencies

9L-27R:	128.15
9C-27C:	121.15
9R-27L:	126.90
10L-28R (Primary):	132.70
10L-28R (Alternate):	120.75
10C-28C:	120.75
10R-28L:	133.00
4L-22R:	121.15
4R-22L:	120.75
CDF GC Inbound:	131.05
CDF GC Outbound:	130.75
GC North Tower:	124.125
GC North of 10L-28R:	121.90
GC South of 10C-28C:	118.05
GC btn 10L & 10C:	120.75
Outbound Ground:	121.75
Alternate Ground:	118.45
SE/SC/SW Cargo:	122.95
Emergency Freq:	119.25
ATIS:	135.40
"YY" Roller Gates:	122.90



Map to be used for
reference ONLY
Not to be used for
aircraft or taxi navigation
It is the responsibility of the
user to ensure they have the
most accurate airport reference map
prior to driving or taxiing on the airfield

O'HARE
INTERNATIONAL AIRPORT