O'Hare International Airport

Frequency Allocation Map

Effective: May 14, 2026 to July 2026

Closed Airfield Pavements

Ground Control: 124.125

Ground / Local Control: 121.15

Ground Control: 121.90

Ground / Local Control 120.75

Ground Control: 118.05

Alternate Ground Control 118.45 when needed by ATC

Areas highlighted in red between 10L-28R and 10C-28C will utilize the same frequency of 120.75 for both Local and Ground control.

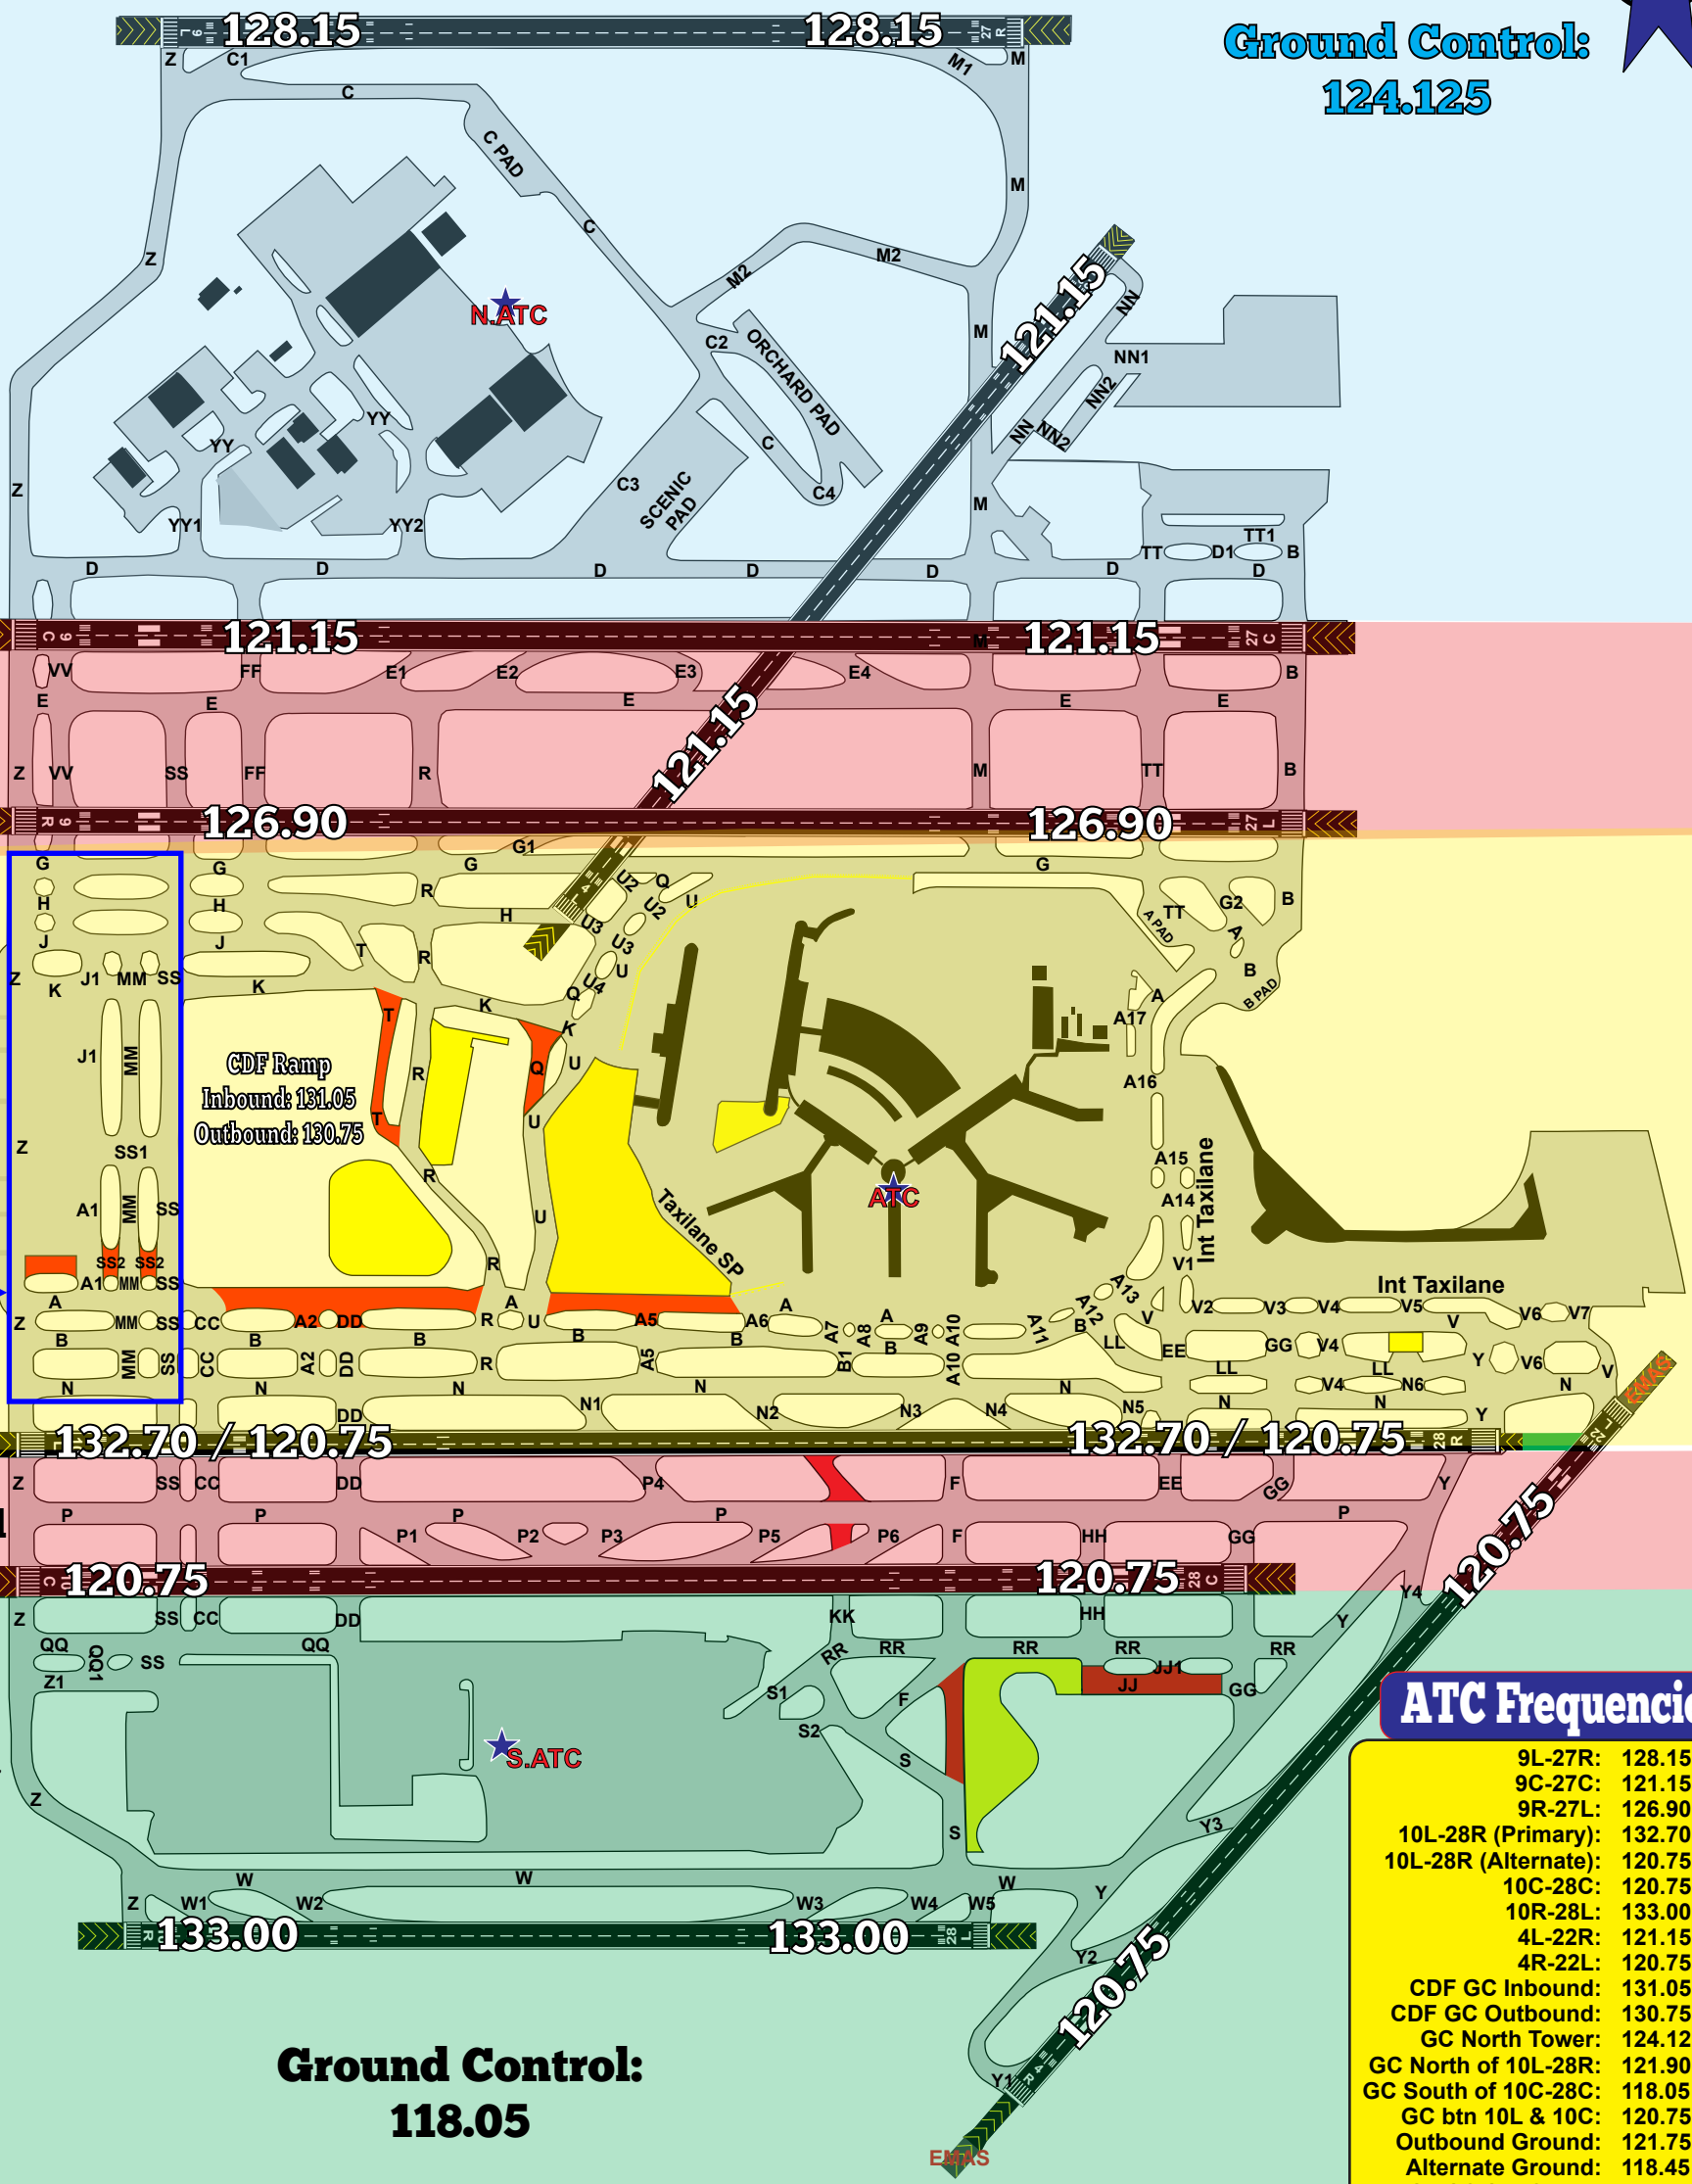

ATC Frequencies

9L-27R:	128.15
9C-27C:	121.15
9R-27L:	126.90
10L-28R (Primary):	132.70
10L-28R (Alternate):	120.75
10C-28C:	120.75
10R-28L:	133.00
4L-22R:	121.15
4R-22L:	120.75
CDF GC Inbound:	131.05
CDF GC Outbound:	130.75
GC North Tower:	124.125
GC North of 10L-28R:	121.90
GC South of 10C-28C:	118.05
GC btn 10L & 10C:	120.75
Outbound Ground:	121.75
Alternate Ground:	118.45
SE/SC/SW Cargo:	122.95
Emergency Freq:	119.25
ATIS:	135.40
"YY" Roller Gates:	122.90

ASSET 2009 - 2026
17 Years of Aviation Safety

Map to be used for reference ONLY
Not to be used for aircraft or taxi navigation
It is the responsibility of the user to ensure they have the most accurate airport reference map prior to driving or taxiing on the airfield

O'HARE
INTERNATIONAL AIRPORT